

BOURNS®

PRODUCT PROFILE



Automotive
Circuit Protection Solutions
Connectors & Switches
Customized Packaging
Magnetics

Precision Variable Resistors
Resistive Products
Sensors & Controls
Surge Protective &
Outside Plant Products

Bourns®

Product Profile

Table of Contents

AUTOMOTIVE

Solutions in Sensor Technology	2
Fuel Cards.....	3
Automotive Electronic Components	4
Automotive Circuit Protection	5

CIRCUIT PROTECTION SOLUTIONS

High-Speed Protector (HSP) Products

TBU® HSP Products	6
TCS™ HSP Products.....	7

Miniature Thermal Cutoff Devices

Mini-Breakers.....	8
--------------------	---

Overcurrent Devices

SinglFuse™ SMD Fuses	9
Multifuse® Polymer PTC Resettable Fuses	10
Multifuse® Polymer PTC freeXpansion™ Products	11
Ceramic PTC Products.....	12
Ceramic PTC Heaters.....	13

Diodes

ChipGuard® ESD Suppressors.....	14
Diode Arrays.....	15
Diodes	16
Power TVS Diodes	17

Shunt Devices

Open LED Shunt Protectors (LSP)	18
---------------------------------------	----

Overvoltage Devices

TISP® Thyristor Surge Protectors	19
Gas Discharge Tubes.....	20
GMOV™ Hybrid Overvoltage Protection Components.....	21
Metal Oxide Varistors (MOV)	22
Multilayer Varistors (MLV)	23

PRECISION VARIABLE RESISTORS

Trimpot® Trimming Potentiometers	24
--	----

SWITCHES

Switches.....	25
---------------	----

CONNECTORS

Modular Contacts.....	26
-----------------------	----

CUSTOMIZED PACKAGING

SEMS: Specialty Engineering & Manufacturing Services	27
--	----

MAGNETICS

Power Inductors & Common Mode Chokes.....	28
Chip Inductors & Chip Beads	29
Transformers	30
Custom Magnetics.....	31

RESISTIVE PRODUCTS

Chip Resistors & Arrays.....	32
Resistors & RC Networks	33
Current Sense Resistors	34
Power Resistors.....	35

SENSORS & CONTROLS

Precision Pressure Sensors	36
Rotary Position Sensors.....	37
Commercial Panel Controls & Encoders	38
Industrial Panel Controls	39
Pro Audio Products.....	40
Commercial Slide Potentiometers	41
Industrial Encoders	42
Precision Controls.....	43
Linear Motion Potentiometers	44
Turns-Counting Dials.....	45

SURGE PROTECTIVE & OUTSIDE PLANT PRODUCTS

Surge Protective Devices (SPDs).....	46
Central Office and OSP Products.....	47

Solutions in Sensor Technology

Types Available:

- Customer specific
- Position, speed and torque sensors

Features:

- Contacting and non-contacting solutions
- Engineering support capabilities
- All Bourns manufacturing sites are IATF 16949 certified and ISO 26262 compliant
- In-house design, toolmaking, screenprinting, cermet firing & injection molding capabilities
- Development of proprietary resistive ink PCBA (Printed Circuit Board Assembly) capabilities
- Innovative & cost-effective solutions



Applications

- ABS wheel speed
- Accelerator pedal
- Active steering
- Brake pedal module
- Chassis level
- Electric park brake
- EPAS
- Exhaust gas recirculation
- Fuel tank level
- Steer-by-wire
- Steering torque
- Throttle position
- Transmission position
- Transmission speed


Fuel Cards

Types Available:

- Rectangular ceramic substrates
- Various ink systems:
 - Resistor
 - Terminations/wiper tracks
 - Protective glazes/polymers
- Wires attached
- Tinned solder pads
- Single or double-sided printing

Features:

- Customer specific patterns
- Up to 100 discrete resistance steps
- Typical resistance ranges from 95 ohms to 1.7k ohms
- Rated current 150 mA
- In line, 100 % dynamic electrical test
- Life cycles:
 - Up to 1 million dry
 - Up to 3 million wet

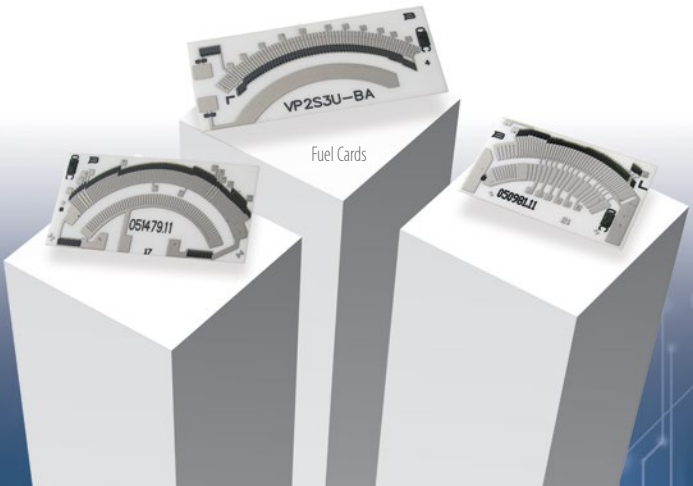

Applications

Fuel level sensing in fuel delivery systems:

- Light duty trucks
- Scooters/motorcycles
- Passenger cars
- SUVs

Automotive Grade Electronic Components

Types Available:

- Inductors
- Transformers
- Power resistors
- Fixed resistors
- Current sense resistors
- Trimpot® trimming potentiometers

Features:

- AEC-Q200 compliant
- TS 16949 factory produced
- Automotive temperature capable
- High quality and reputation



Applications

- Battery management
- Cameras
- DC/DC & AC/DC power supplies
- Diagnostic tools
- Electronic control modules/ECU
- Infotainment, telematics, navigation, connected cars
- Instrument clusters
- Lighting
- Networking
- OBCs (on board chargers)
- Start-stop


Automotive Grade Circuit Protection

Types Available:

- Multifuse® PPTC resettable fuses
- SinglFuse™ SMD fuses
- ChipGuard® MLVs
- Diodes
- LED shunt protectors

Features:

- Overcurrent protection for automotive and other applications
- IATF 16949 quality system
- Resettable PTCs suitable for application temperatures up to 125 °C
- SinglFuse™ SMD Fuses suitable for application temperatures up to 150 °C
- AEC-Q101 compliant diodes
- AEC-Q200 compliant
- Wide range of current ratings
- Dedicated automotive CP team
- Transient protection

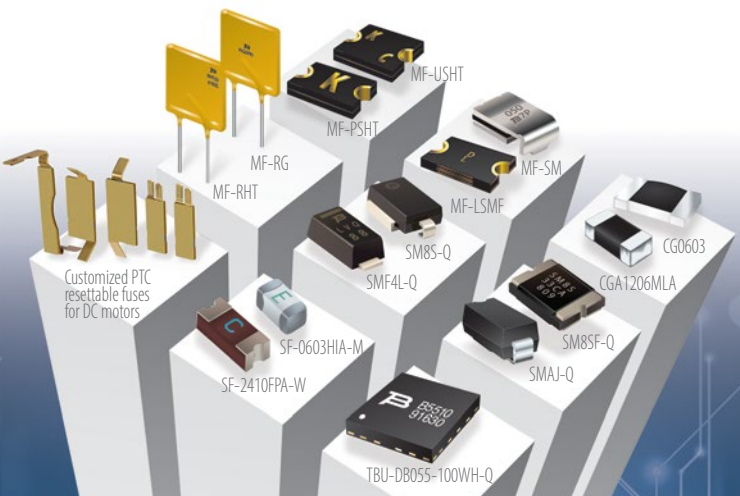

Applications

- Battery Management Systems
- Car alarm systems
- Cooling & HVAC systems
- Electronic control unit (ECU) input/output protection
- GPS shark fin antennas
- Infotainment, telematics and navigation input/output protection
- Load dump and other transient voltage protection
- Other DC motor applications
- Powerbus (mode protection) applications
- Power steering motors
- Seat adjustment motors
- Sunroof activation motors
- Window regulators


TBU® High-Speed Protectors

Types Available:

- Single bidirectional
- Dual unidirectional
- Dual bidirectional

Features:

- Extremely high-speed performance
- Blocks high voltages & currents up to rated limits
- Exceptionally low let-through energy
- Very high bandwidth, GHz compatible
- AEC-Q101 compliant models available
- UL recognized components
- Low insertion loss up to frequencies beyond GHz
- No capacitance to ground
- Programmable
- RoHS compliant*

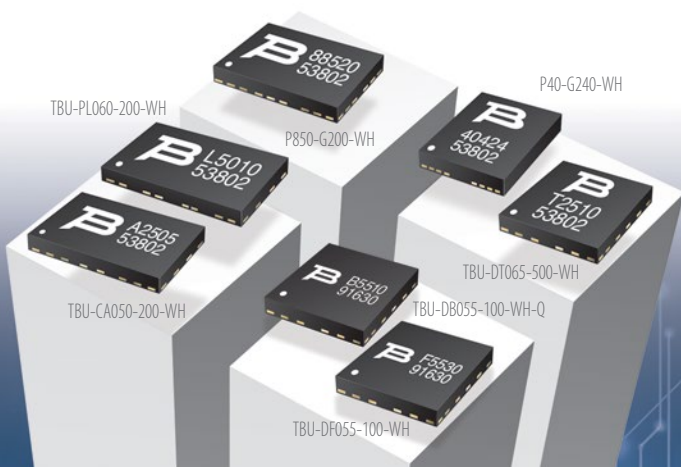

Applications

Telecom

- AISG V2.0
- xDSL interfaces
- Smart grid
- ONUs & ONTs
- Gateways & modems
- VoIP equipment
- 10/100 & Gigabit
- POTS linecards
- SLIC

Industrial

- RS232, RS422, RS485, CANbus and LVDS
- Remote metering & surveillance
- Industrial automation
- Test equipment
- Avionics
- Rail and mass transit


TCS™ High-Speed Protectors

Types Available:

- Dual bidirectional

Features:

- Extremely high-speed performance
- Low let-through energy
- Very high bandwidth, GHz compatible
- UL recognized components
- Low insertion loss up to frequencies beyond GHz
- No capacitance to ground
- Well-matched channel to channel resistance
- Low resistance
- RoHS compliant*

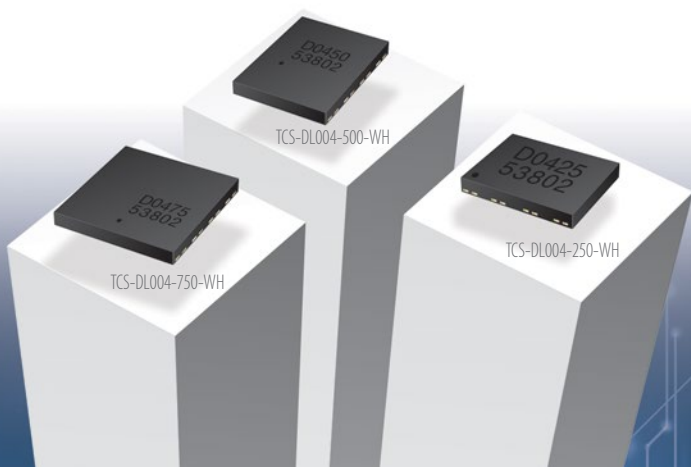

Applications


- xDSL
- Gigabit Ethernet
- High-speed signal lines
- PoE Equipment
- Protection modules & dongles
- Process control equipment
- Test & measurement equipment

- Low current series (LC, NRC)
- High current series (AC, AA, HC, NRA, CBA)
- Surface mount series (SAS, SAC, SCA)

Battery cell protection for:

- Notebook PCs
- Tablet PCs
- Smartphones
- Power banks
- Thermally sensitive circuits
- USB Type-C cable thermal protection

- Overtemperature and overcurrent protection in a single device
- Resettable protection
- Wide range of temperature options: 72 °C, 77 °C, 82 °C, 85 °C and 90 °C
- Low resistance
- Small & thin size for compact package design
- High corrosion resistance properties
- RoHS compliant*

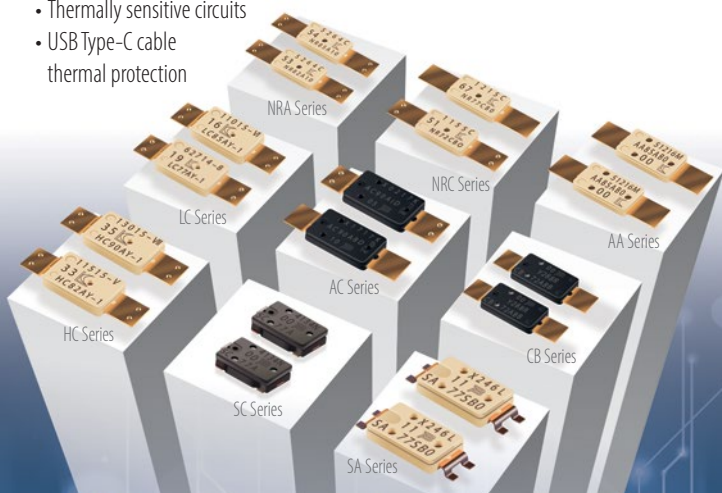

Model	Trip Temperature (°C)	Trip Current @ 60 °C	Voltage
HC	72, 77, 82, 85, 90	7, 8.5, 9.5, 11, 12 A	28 V
AC	72, 77, 82, 85, 90	9, 12, 14, 16, 18 A	28 V
LC	72, 77, 82, 85	2.7, 3.8, 4.5, 5 A	28 V
NRA	72, 77, 82, 85	7.94, 9.81, 10.37, 11.5 A	28 V
NRC	72, 77, 82, 85	3.36, 4.08, 4.58, 5.1 A	28 V
SAC	72, 77, 82, 85	3.86, 4.55, 5.42, 5.74 A	28 V
SAS	72, 77, 82, 85	8.86, 10.34, 12.04, 12.42 A	28 V
SC	72, 77, 82, 85	6.28, 7.22, 8.37, 8.7 A	28 V
CB	72, 77, 82, 85	6.51, 9.2, 11.47, 11.97 A	28 V


SinglFuse™ SMD Fuses

Types Available:

- Fast-acting
- Fast-acting precision
- Slow blow
- Time lag
- High inrush
- 7 available footprints:
0402 (1005 metric)
0603 (1508 metric)
1206 (3216 metric)
1210 (3225 metric)
2410 (6125 metric)
2923 (7358 metric)
3812 (10030 metric)

Features:

- Single blow fuse for overcurrent protection
- UL recognized & IEC Compliant
- AEC-Q200 compliant models available*
- Surface mount packaging for automated assembly
- Thin film, multilayer, wire-in-air, ceramic tube/cube constructions
- Surge capability for specific models
- RoHS compliant** and halogen free***
- Wide range of fusing speeds, current ratings, voltage ratings, interrupt ratings and footprint sizes

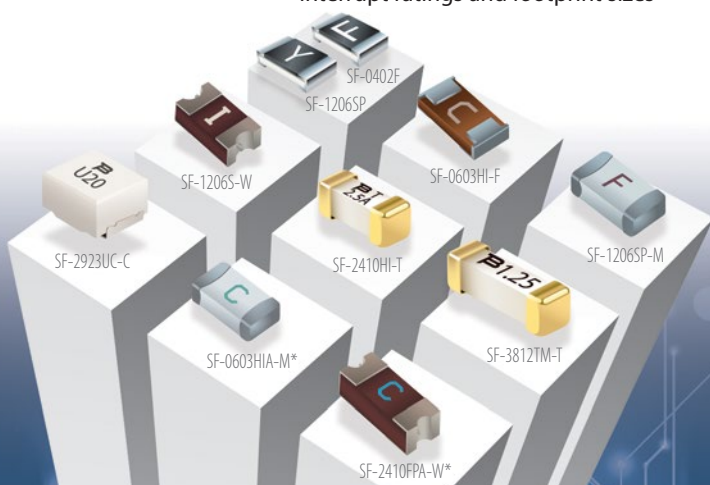

Applications

- Automotive*
- Battery chargers
- Battery Management Systems (BMS)
- Wireless headsets
- Cellphones
- Digital cameras
- Disk drives
- DVD players
- LCD monitors
- Industrial controllers
- Portable memory
- PDAs
- Rechargeable battery packs
- Set-top boxes
- Telecommunication requiring surge protection

*Meets Bourns internal AEC-Q200 equivalence test plan.

**RoHS Directive 2015/863, Mar 31, 2015 and Annex.

***Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.


Multifuse® Polymer PTC Resettable Fuses

Types Available:

- Radial leaded through-hole
- Surface mount
(0402, 0603, 0805, 1206, 1210, 1812, 2018, 2920 & 3425)
- Axial leaded battery strap
- Unencapsulated chip/disc
- Customized solutions for DC motors

Features:

- 6 to 90 V operating voltages
- Hold currents from 50 mA to 13 A
- Agency recognition - UL, CSA & TÜV
- Interrupt voltages of 250 V with surge capabilities for assisting in meeting US and international telecom requirements
- High temperature polymers available with operating temperatures between -40°C and $+125^{\circ}\text{C}$
- Custom designs available upon request
- Bulk, embossed tape and ammo pack packaging
- AEC-Q200 compliant models available
- RoHS compliant** & halogen free***

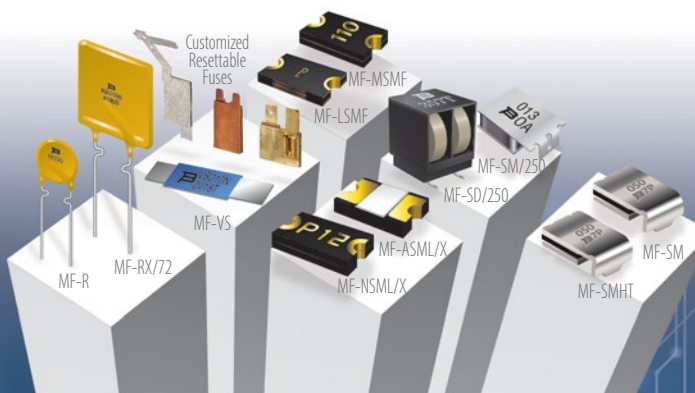

Applications

- Batteries
- Charging ports
- Computers
- DC motors
- Game consoles and toys
- Industrial controls
- Medical devices*
(excluding critical life support)
- Point of Sale equipment
- Portable electronics
- Security systems
- Telecommunications

**RoHS Directive 2015/863, Mar 31, 2015 and Annex.

***Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

Multifuse® Polymer PTC freeXpansion™ Products

Types Available:

0402

- MF-ASML/X Low Ohmic Series

0603

- MF-FSMF Series
- MF-PSML/X Low Ohmic Series

0805

- MF-PSMF Series
- MF-PSML/X Low Ohmic Series
- MF-PSHT High-Temp. Series

1206

- MF-NSMF Series
- MF-NSML/X Low Ohmic Series
- MF-NSHT High-Temp. Series

1210

- MF-USMF
- MF-USML/X Low Ohmic Series
- MF-USHT High-Temp. Series

1812

- MF-MSMF Series

2018

- MF-SMDF Series

2920

- MF-LSMF Series


3425

- MF-GSMF Series

Features:

Unique freeXpansion™ design provides:

- Greater resistance stability
- Smallest Bourns® PTCs
- Highest Bourns voltage withstand
- Highest Bourns hold current (I_{hold})
- Extended product life
- Low ohmic materials available in SMD for high hold current and low resistance applications
- High temperature material available in SMD for higher ambient temperatures

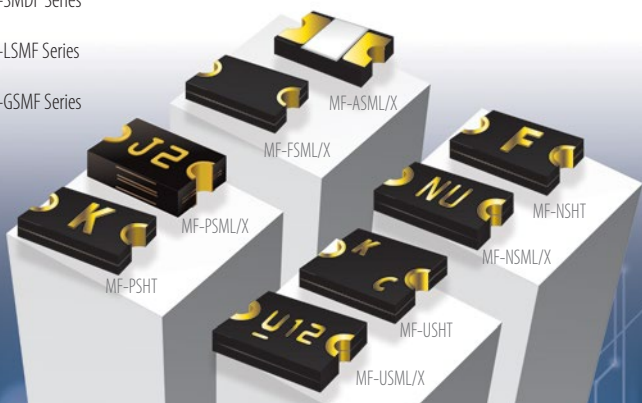

Applications

- Game consoles
- GPS navigation systems
- Mobile phones - battery & port protection
- Industrial controllers
- PC motherboards - plug & play protection
- PDAs / digital cameras
- Portable medical devices
- Portable memory
- USB 2.0, USB 3.0, USB 3.1 & HDMI port protection

*(excluding critical life support)**

**Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice: <http://www.bourns.com/docs/legal/disclaimer.pdf>.*

Ceramic PTC Products

Types Available:

- Radial leaded through-hole
- Surface mount
- Dual-packaged surface mount
- Unencapsulated disk or chip

Features:

- Aids compliance with:
 - ITU-T K.20/21/45
 - Telcordia GR-1089-CORE
 - UL 60950, 3rd Edition
- UL recognized
- Matching available with narrow resistance tolerance
- Alternative tolerances and resistances on request
- Overload inrush-current limiting
- RoHS compliant*



Applications

Overcurrent protection for telecom applications:

- Access equipment (POTS)
- Central office (CO)
- Customer premises equipment (CPE)
- PABX protection
- Set-top boxes
- VOIP protection
- xDSL and integrated linecards

**RoHS Directive 2015/863, Mar 31, 2015 and Annex.*


Ceramic PTC Heaters

Types Available:

- Radial leaded through-hole
- Customized rectangular and circular designs
- Custom assemblies with housing & wiring

Features:

- Self-regulated heating
- Simple circuit design
- Suitable for clamp-contact
- Long life stability
- Silver (Ag) and aluminum (Al) electrode plating
- Stepped and full electrodes
- Ground and unground edges
- Variety of surface temperature, Curie temperature, R_{min} , and operating voltage ratings available
- AEC-Q200 compliant models available

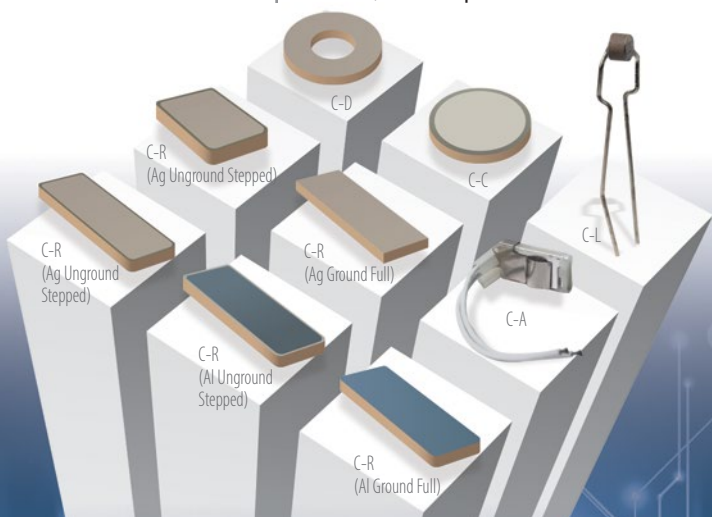

Applications

- Home appliances
- HVAC systems

**RoHS Directive 2015/863, Mar 31, 2015 and Annex.*


ChipGuard® ESD Suppressors

Types Available:

- Multilayer varistor
- Polymer technologies
- Air-gap technologies

Features:

- ESD protection to industry specification IEC 61000-4-2
- Minimum 8 kV contact and 15 kV air discharge ESD withstand
- SMD packages (0201, 0402, 0603, 0805, 1206)
- AEC-Q200 compliant models available
- RoHS compliant*

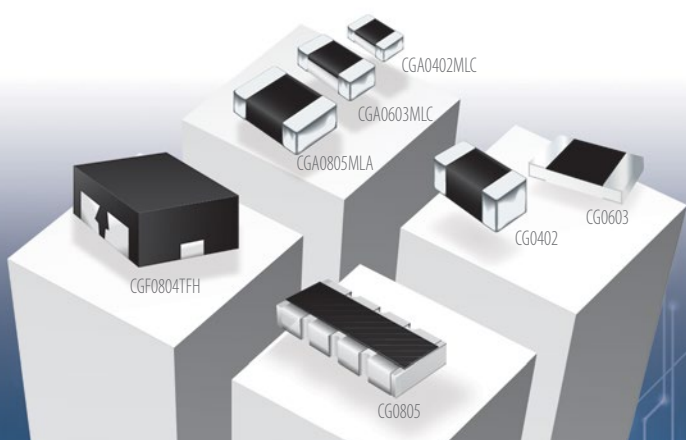

Applications

- HDMI 1.4
- CANbus
- Ethernet
- Digital Visual Interface (DVI)
- USB 3.0 / USB OT
- MIPI
- MHL
- Memory protection
- SIM card ports
- Camera links
- Sensors
- Touchscreen interfaces
- GPS
- Antennas
- High-speed communication buses
- Circuits sensitive to ESD


Diode Arrays

Types Available:

- Transient voltage suppressor (TVS) diodes
- Transient voltage suppressor (TVS) diode arrays
- Steering diode arrays

Features:

- Excellent high frequency response
- SMD packages (DFN2, DFN4, DFN6, DFN10, SOD323, SOT563, SC70-6, SOT23, SOT23-6, SOT143A, SOIC 8, NSOIC 8L, NSOIC 16L & MSOP 10L)
- AEC-Q101 compliant models available
- RoHS compliant*

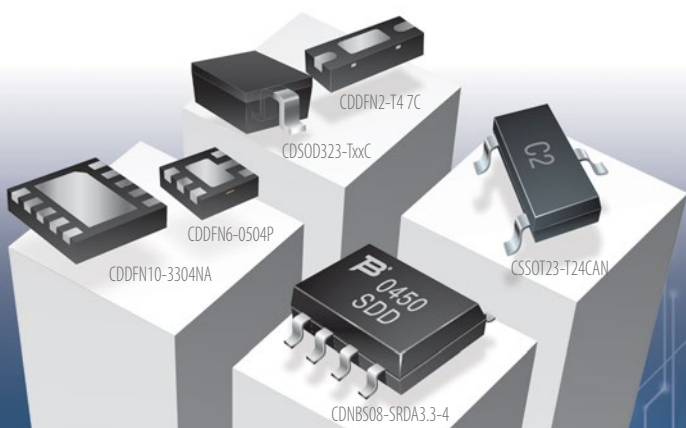

Applications

- Appliances
- Consumer electronics
- HMI, touch interfaces
- High-speed communication ports such as USB 3.0, IEEE1394, HDMI, Gb Ethernet
- Fast communication ports such as USB 1.1, 10/100b Ethernet ports
- RS232, RS422 & RS485 type applications


Diodes

Types Available:

- Transient voltage suppressor (TVS) diodes
- Transient voltage suppressor (TVS) diode arrays
- Steering diode arrays
- Schottky barrier diodes
- Schottky rectifier diodes
- Fast response rectifier diodes
- High voltage rectifier diodes
- Bridge rectifier diodes
- AEC-Q101 compliant TVS diodes

Features:

- Surface mount devices
- Leadless - DFN2, DFN4, DFN6, DFN10, SOD-123FL, DO-218, 0603, 1005, 1206, 1408, 1607, 2010 & 2320 packages available
- SMA, SMB, SMC, SOT563, SC70-6, SOT23 & SOT23-6 packages available
- 8L & 16L NSOIC, 16L WSOIC & 10L MSOP packages available
- Tape & reel packaging
- RoHS compliant*

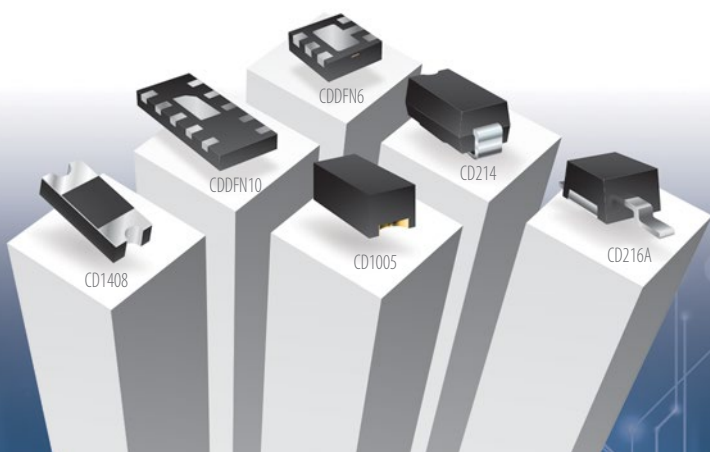

Applications

- Appliances
- Base stations
- Digital cameras
- Desktop PCs & notebooks
- MP3 players
- Portable electronics
- Port protection (USB 1.x, 2.0, 3.x, Ethernet, HDMI, RS comm ports, etc.)

**RoHS Directive 2015/863, Mar 31, 2015 and Annex.*


Power TVS Diodes

Types Available:

- Surface mount
- Axial lead

Features:

- Robust lightning protection
- 1, 3, 6, 10 & 15 kA peak current rating
- Rigid voltage clamp
- Voltages from 15 V to 430 V
- Simple design
- Axial lead and surface mount packages
- Common PCB footprint for all axial leaded devices
- UL recognized components
- RoHS compliant*

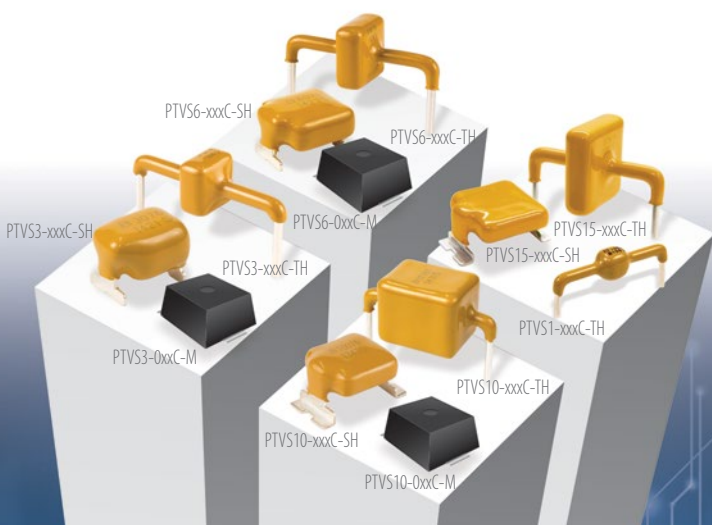

Applications

- AC and DC input power line protection in certain harsh environments
- High reliability applications requiring high energy surge protection and a rigid voltage clamp
- Industrial equipment
- Street lighting
- Solar inverters
- Telecom base station equipment

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.


Open LED Shunt Protectors (LSP)

Types Available:

- SMB package
- SMA package

Features:

- Fast switching
- Industry standard, small footprint
- Suitable for industrial lighting environments
- Improved uptime of the end application by shunting / bypassing open-circuit LEDs in a series string
- Can assist with ENERGY STAR® compliance
- RoHS compliant*

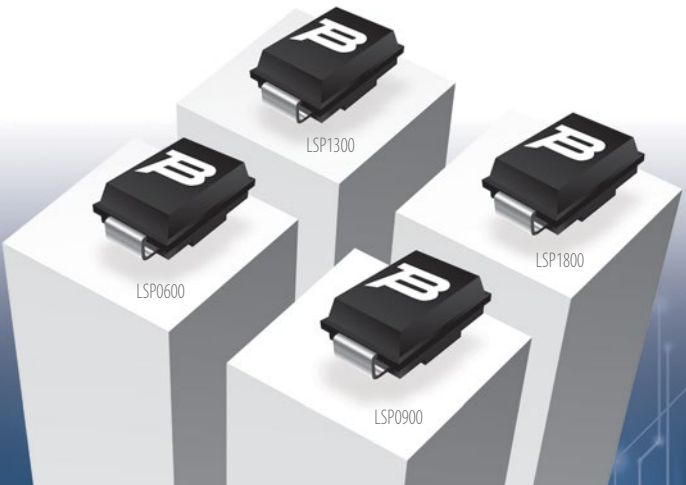

Applications

- Vehicle lighting
- High-bay industrial lighting
- Intrinsically safe lighting
- LED streetlights
- Low maintenance lighting

**RoHS Directive 2015/863, Mar 31, 2015 and Annex.*


TISP[®] Thyristor Surge Protectors

Types Available:

- Unidirectional
- Bidirectional
- Programmable
- ACTP – AC Transient Protectors

Features:

- Protection voltages from 15 V - 700 V
- Dedicated SLIC protection
- Telephone port protection
- xDSL (including G.fast) protection
- UL recognized
- Assists with Telcordia GR-1089, UL 60950, FCC (TIA), ITU-T, IEC & YD/T compliance
- Offline AC power supply protection
- Specified in chipset reference designs for 15 years

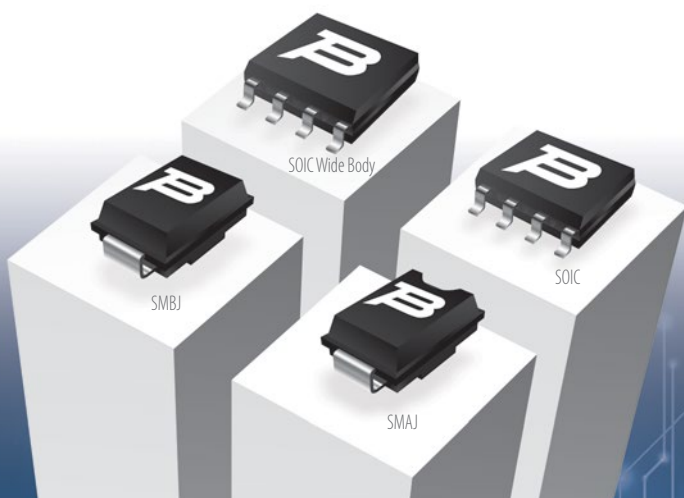

Applications

- Central office, access network and customer premises equipment
- FTTx equipment
- ISDN and NT protection
- Modems, gateways and set-top boxes
- Offline Switch Mode Power Supplies (SMPS)
- POTS protection
- VoIP protection
- xDSL protection


Gas Discharge Tubes

Types Available:

- Light duty
- Medium duty
- Heavy duty
- High voltage
- High current
- FLAT® technology
- Hybrid
- Powerline

Features:

- 75 - 7200 V operating voltages
- 8/20 μ s surge current ratings of 2 kA - 100 kA
- Low capacitance
- Through-hole & surface mount packages available
- Switch Grade Fail-Short options
- Fast GDT versions available
- Low overshoot hybrid designs
- UL, Telcordia, REA, IEEE, ITU-T and IEC recognition
- RoHS compliant*

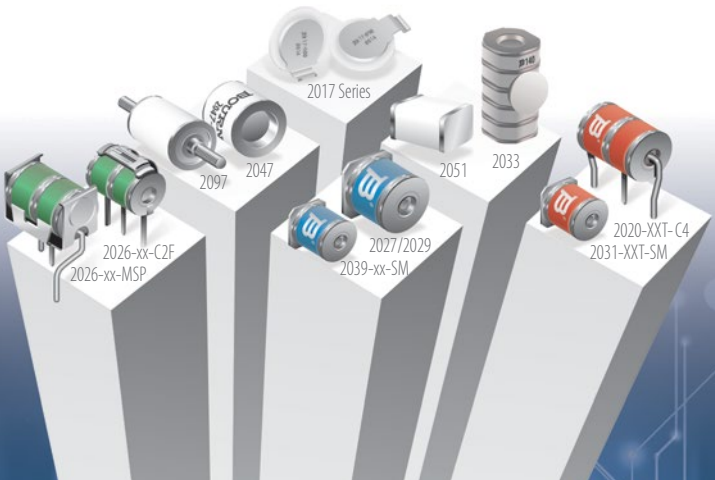

Applications

- Appliances
- CATV/broadband
- Consumer electronics
- Data communications
- Industrial power ports
- Industrial and process controls
- Telecommunications
- Transportation signaling

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.


GMOV™ Hybrid Overvoltage Protection Components

Types Available:

- 14 mm through-hole
- 20 mm through-hole

Features:

- Hybrid design using Bourns' patented FLAT® technology
- Standard 14 mm & 20 mm sizes
- Matched GDT-MOV pairings
- Low leakage
- Bidirectional protection
- Low capacitance
- UL 1449 4th edition Type 5 Recognized
- RoHS compliant*

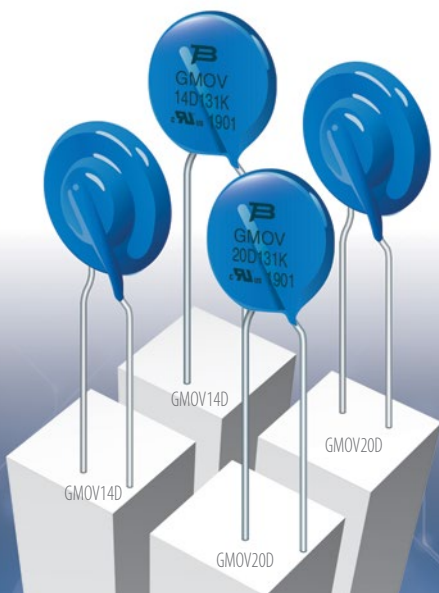

Applications

AC Line Protection:

- White goods
- Power line communications

- Smoke alarm systems
- High value consumer goods

DC Line Protection:

- Solar inverters
- Power supplies
- Distribution systems

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

Metal Oxide Varistors (MOV)

Types Available:

High Energy:


- ZOV Series
- ZOVR Series
- ZOVS Series
- ZOVA Series
- ZOVH Series

Medium Voltage

- CV Series
- CVQ Series
- SV Series
- ZV Series

Features:

- Varistor sizes 5 mm - 60 mm
- Wide range of voltage ratings
- Wide range of current ratings
- UL recognized
- Temperature ratings up to +125 °C
- Wide range of customizable options
- RoHS compliant*

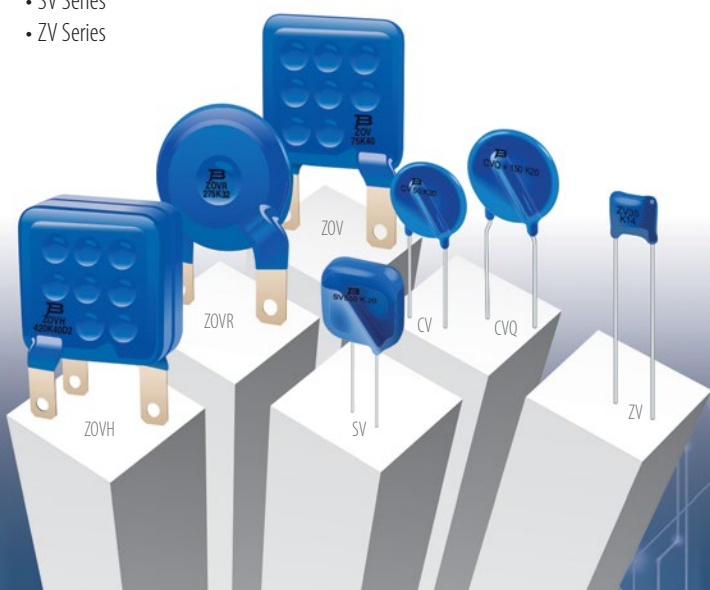

Applications

AC line protection:

- Surge protective devices
- LED lighting
- Solar inverters
- Power supplies
- Industrial electronics
- High value consumer goods

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

Multilayer Varistors (MLV)

Types Available:

Medium Voltage:

- DV Series
- PV Series

Low Voltage:


- ZV/ZVHT Series
- ZVE Series
- ZVX Series

Automotive Grade:

- AV/AVHT Series
- MV Dual Function Series
- OV Dual Function Series

Features:

- Multilayer design
- Wide range of sizes and voltages
- Operating temperature ranges up to +150 °C
- Low leakage
- High energy absorption
- AEC-Q200 compliant models available (AV, AVHT)
- RoHS compliant*

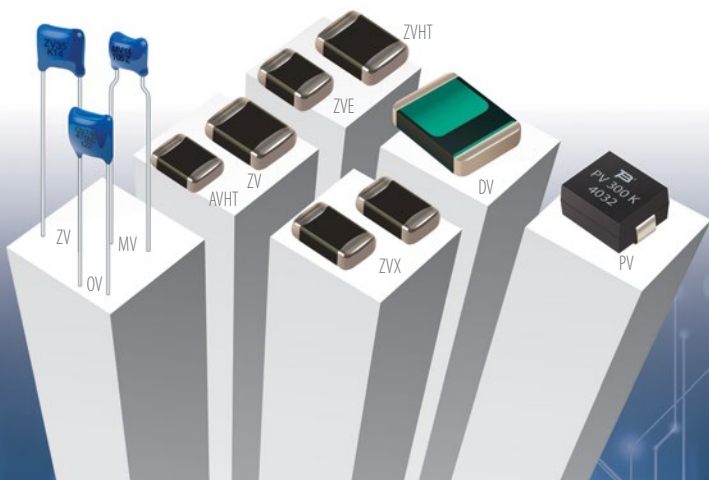

Applications

- Data lines
- Handheld electronics
- Communications products
- Low voltage industrial products
- Data ports
- Smoke alarms
- Sensors

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.


Trimpot® Trimming Potentiometers

Types Available:

- Surface mount
- Through-hole
- Single-turn
- Multiturn
- Sealed
- Open frame
- MIL-SPEC

Features:

- Top, bottom, side, front, and back adjust
- 2 mm to 12.7 mm size range
- Packaging: Tube, bulk, embossed tape, ammo pack, radial tape and reel
- Compatible with pick and place equipment
- Largest selection of sealed trimming potentiometers in the industry
- Custom designs available upon request
- Substrate, ink, rotor, epoxy and shaft development and production

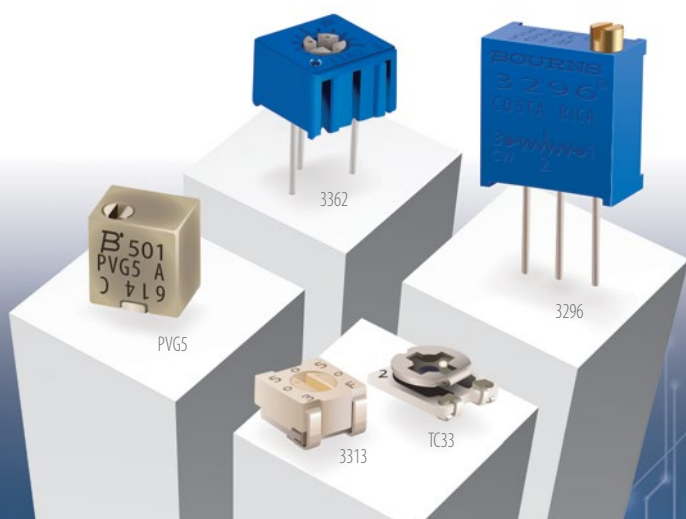

Applications

- Analytical equipment
- Automated gates/doors
- Automation equipment
- Blood chemical analyzers
- Calibration equipment
- CCTV cameras
- Communication equipment
- Fire alarms
- Fluid measurements
- GPS navigation
- Industrial/graphic printers
- Laser altimeters
- Laser diode drivers
- Medical meters
(excluding critical life support)
- Metal detectors
- Military radios
- Network analyzers
- Oscilloscopes
- Portable/handheld radios
- Proximity sensors
- Radar systems
- Radiation & X-ray testers
- Relays
- RFID systems
- Satellite systems
- Scanners
- Set-top boxes
- Smoke detectors
- Temperature & respiratory monitors
(excluding critical life support)
- Transmission equipment


Switches

Types Available:

- Rotary
- Tactile

Features:

- Available in surface mount and through-hole configurations
- PC pins, gull wing, and J-hook terminal styles
- Sealed for PCB processing
- 3, 4, and 6 mm sizes
- Tube and embossed tape carrier packaging

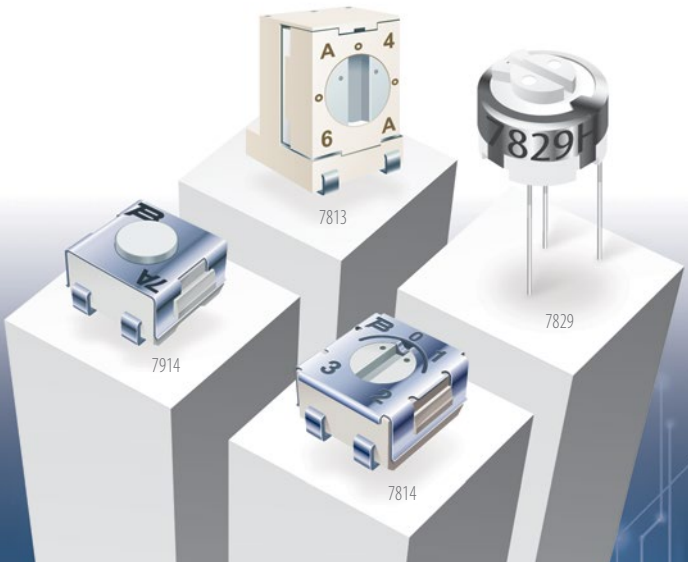

Applications

- Appliances
- Audio/visual
- Computers
- Communications equipment
- GPS
- Industrial controls
- Instrumentation
- Proximity sensors
- Security systems
- Sensors
- Telecommunications
- Test equipment
- Temperature sensors


Modular Contacts

Types Available:

- Male
- Female
- SMT
- Through-hole

Features:

- Precious metal contacts
- Available in 2-6 contacts
- Available in 3 pitch sizes:
1.27 mm, 2.54 mm, 5.0 mm
- Up to 50,000 cycles
- Contact resistance < 0.030 ohms
- Packaging: tube and embossed tape (7-inch and 13-inch)
- RoHS compliant*
- Halogen free**

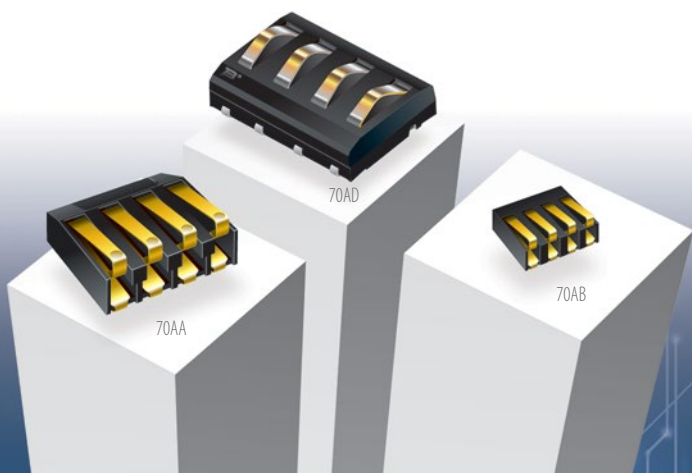

Applications

- Battery packs
- Wireless speakers
- Docking stations
- E-readers
- Laptop computers
- Medical devices
- PDAs
- Portable chargers
- Rechargeable Smart phones
- Tablets

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

**Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.


SEMS: Specialty Engineering & Manufacturing Services

Types Available:

- Single in-line
- Dual in-line
- COB (Chip-On-Board)
- Interposer
- System in package
- QFN
- QFP (Quad Flat Pack)
- Mini-DIL
- TO-Cans
- Butterfly
- Hermetic seal custom

Features:

- Technology Integration
- IC packaging technology
- Product launch control
- Fast time to market
- PCBA
- Thick film
- Engineering
- Customization
- Manufacturing
- High-mix low/medium volume
- Built-to-print service

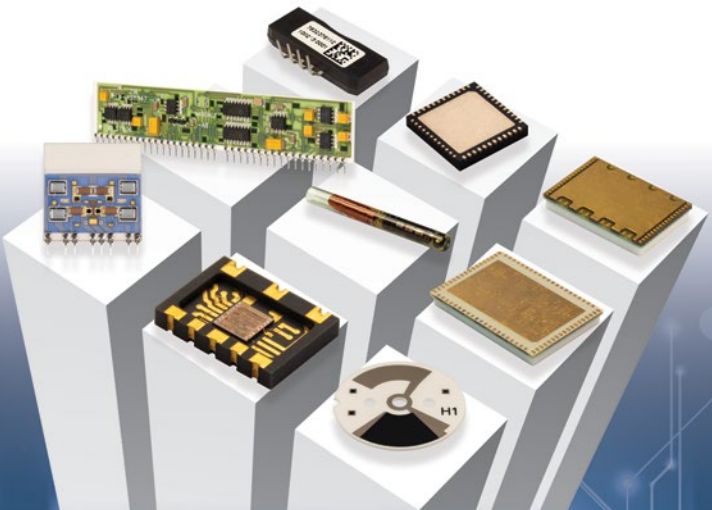

Applications

- 5G
- Instrumentation
- Industrial sensors & controls
- Optic assemblies
- Medical equipment
(low/medium risk)*
- RF/wireless
- Telecommunications
- Transportation
- Internet of Things (IoT)

**Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice <http://www.bourns.com/docs/legal/disclaimer.pdf>.*

Power Inductors & Common Mode Chokes

Types Available:

Power Inductors


- Non-shielded
- Semi-shielded
- Shielded
- High current shielded
- High current toroids
- Dual chokes
- Flat wirewound
- Ferrite core
- Metal alloy powder core

Common Mode Chokes

- Toroid
- High current
- High impedance
- Sector-wound
- Bifilar-wound

Features:

- Standard inductance values from 1.0 nH to 100 mH
- More than 170 surface mount power inductor models
- More than 50 through-hole power inductor models
- Available in a wide range of sizes
- Operating temperature as high as 200 °C
- Saturation current up to 118 A
- AEC-Q200 compliant models available

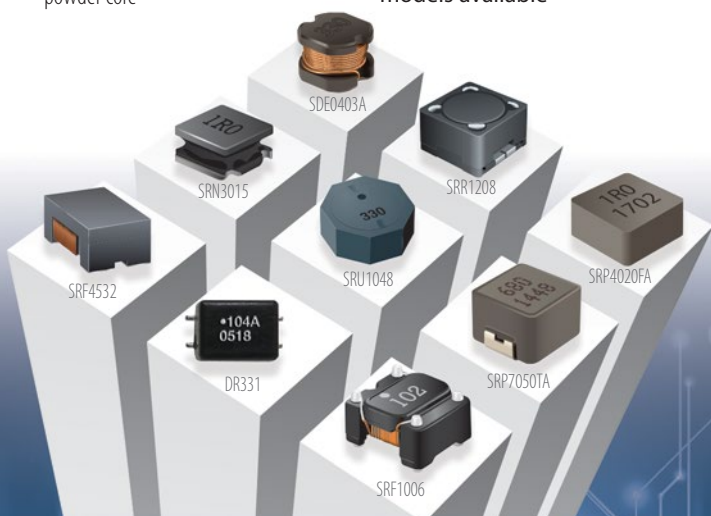

Applications

- Battery chargers
- BMS
- CD players
- Data communication
- DC/DC converters
- Global positioning systems
- Internet equipment
- LED drivers
- Local area networks
- Monitoring equipment
- PMIC
- Portable radios
- Portable tools
- SSD (Solid State Drives)
- Switch mode power supplies
- Solar power conversion
- Test equipment
- Televisions
- Video conferencing equipment
- Telecommunications
- Wearables

Chip Inductors & Chip Beads

Types Available:

Chip Inductors


- Encapsulated
- Wirewound
- Multilayer ceramic
- Multilayer ferrite
- Open wirewound

Chip Beads

- High current
- High impedance

Features:

- Magnetic shielding
- Low profile 0.5 mm height available
- Accurate dimensions for automatic surface mounting
- Wide impedance range
- AEC-Q200 compliant models available
- RoHS compliant*

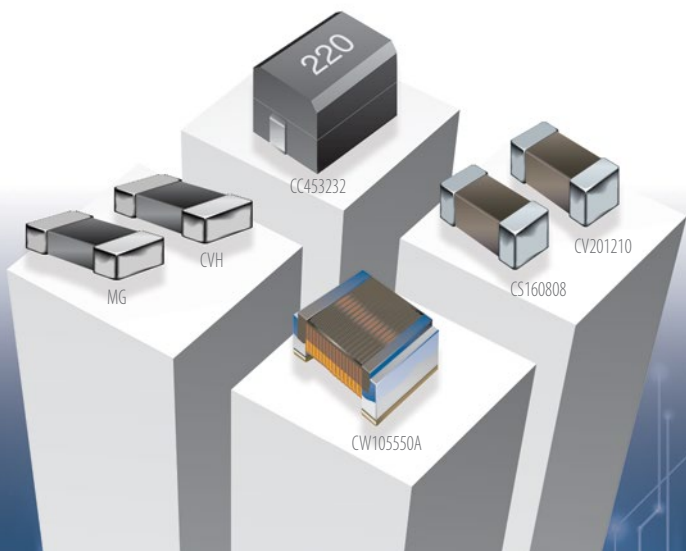

Applications

- Power supplies
- IC power lines
- Signal lines
- RF modules
- Mobile phones
- GPS receivers
- CTV, VCR, HIC, FDD
- Wireless PDAs, LANs
- CATV filters, tuners
- Cable modems, set-top boxes

**RoHS Directive 2015/863, Mar 31, 2015 and Annex.*


Transformers

Types Available:

- Line-matching
- LAN
- Chip LAN
- PoE/VoIP
- BMS
- High voltage isolation
- Power

Features:

- 10/100/1000 Base -T
- Operating temperature up to +125 °C
- High working and isolation voltage
- PoE+
- Compliant with IEEE 802.3
- Compliant with IEC 60950
- AEC-Q200 compliant models available
- RoHS compliant*

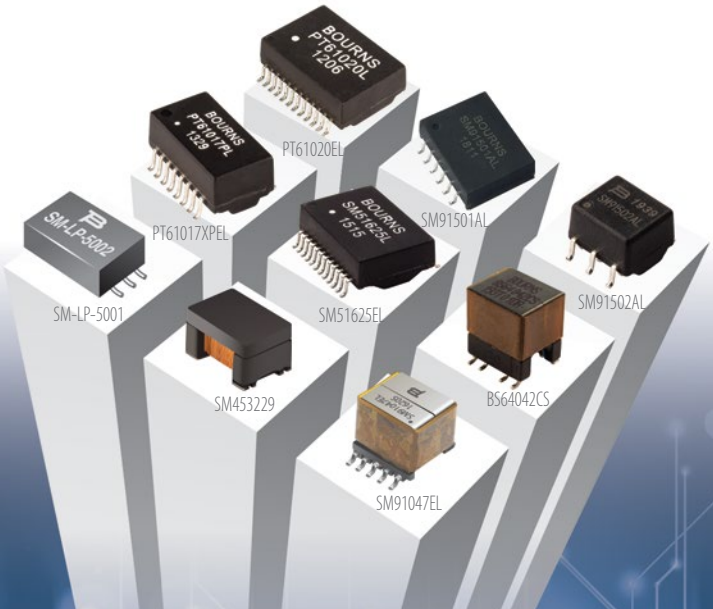

Applications

- Battery management
- LAN
- Ethernet
- xDSL
- Power over Ethernet
- PoE+
- Modems
- Laptop computers
- Telecommunications
- Instrumentation
- AC/DC power supplies
- Home metering
- Home automation
- Appliances
- White goods
- LED drivers

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

Custom Magnetics

Types Available:


- Transformers for high power
- Planar transformers for medium power
- Push-pull transformers for low power
- Flyback transformers
- Flat wire inductors
- CMC and DMC chokes
- PFC chokes

Features:

- Standard and custom designs
- Designed to comply with, but not restricted to: Insulation Class: B, F H
- Industry Standards: UL 508, EN-61558-1, EN 60950, EN 62368-1

Quality:

- VDA 6.3, Factory IATF 16949 certified
- High volume, high automation production capabilities
- High frequency power topologies: buck, boost, SEPIC, CUK, half and full bridge LLC, push-pull, forward, flyback

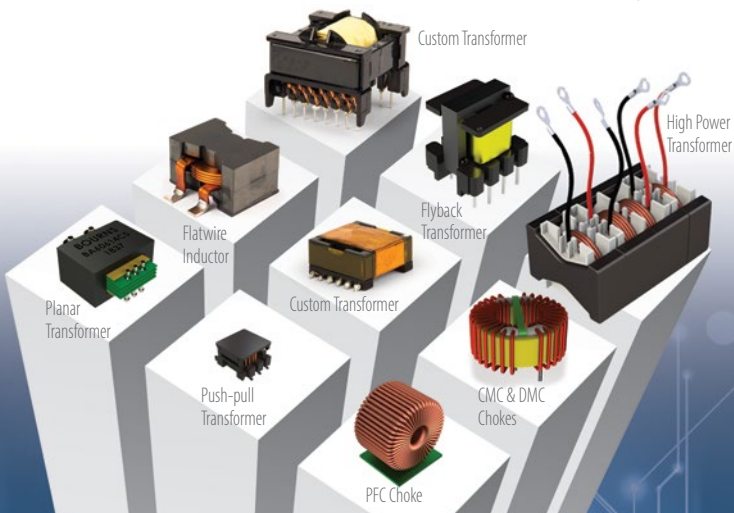

Applications

- High-frequency switching power supplies
- AC/DC, DC/DC & DC/AC converters
- On-board chargers
- Charging stations
- Battery management
- Renewable energy
- Consumer electronics
- Communications
- Instrumentation
- Industrial
- Medical (low/medium risk)*

**Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice <http://www.bourns.com/docs/legal/disclaimer.pdf>.*


Chip Resistors & Arrays

Types Available:

- Thick film chip arrays
- Thick film chip resistors
- Thin film chip resistors
- Metal strip chip resistors
- Sulfur-resistant available
- Metal foil chip resistors
- Wide terminal chip resistors
- Four terminal chip resistors

Features:

- Standard resistance values from 0.0005 ohms to 20 megohms
- Standard resistance tolerances from 0.01 % (thin film only), 1.0 % & 5.0 %
- Chip resistors: 01005-size to 2512-size
- Chip arrays: 0201 x 2 to 0603 x 8-size
- High power up to 3 W (thick film and metal strip)
- AEC-Q200 compliant models available (thick film and metal strip)
- UL1676 listed high voltage and high surge withstand (thick film)
- Sulfur-resistant (thick and thin film)

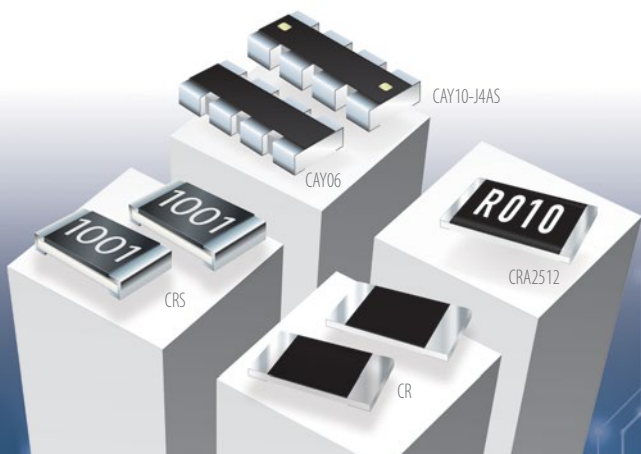

Applications

- Navigation
- Current sense
- Cellular and cordless phones
- Communications interface
- Flashlights
- High voltage applications
- Infotainment
- Intercom systems
- Internet telephony
- Local area networks
- Measurement equipment
- Memory modules
(incl. sulfur-resistant type)
- Portable digital assistants
- Portable tools
- Power supplies: DC/DC; AC/DC; DC/AC
- Pulse power applications
- Remote controllers
- Telecom switching devices
- Test equipment
- White goods


Resistor & RC Networks

Types Available:

- Thick film resistor networks
- Thin film on ceramic resistor networks
- Resistor/capacitor (RC) networks
- Tin lead plating available on some models

Features:

- Surface mount and through-hole mounting
- SIP and DIP packages
- Molded and conformal-coat packages
- Standard resistance values from 10 ohms to 10 megohms
- Custom networks for non-standard circuits and values
- SIP package height as low as 0.195 inch
- Operating temperature range of -55°C to $+125^{\circ}\text{C}$

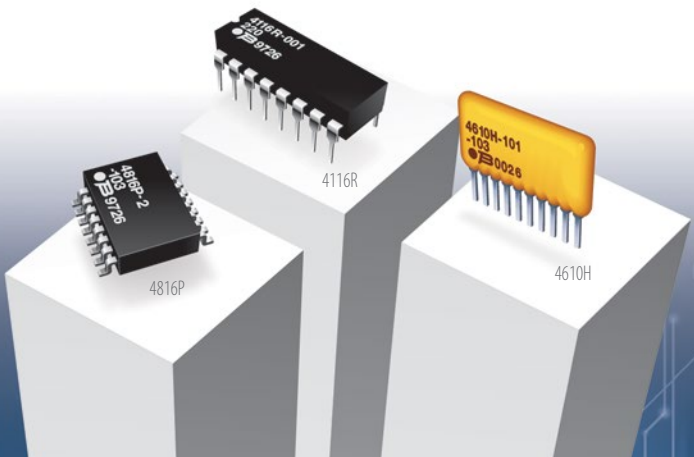

Applications

- Access equipment
- Bar code scanners
- Cable boxes
- Computer peripherals
- Consumer electronics
- Data communication
- Fax equipment
- Modems
- Monitoring equipment
- Portable power generators
- Power supplies: DC/DC; AC/DC; DC/AC
- Satellite systems
- Telecom switching devices
- Test equipment


Current Sense Resistors

Types Available:

- High power thick film chip
- High power metal strip chip
- Electron beam welded metal strip

Features:

- Two and four terminal
- 25 microohms to 1 ohm
- 0.1 watts to 50 watts
- 0603 ~ 2512 sizes up to 3 watts
- Electron beam welded metal strip (2512 ~ 5930 sizes)
- High power shunts (6918, 7036, 8518 sizes)
- Very low TCR, from 50 ppm/°C
- AEC-Q200 compliant models available (Electron beam welded shunts, thick film and metal strip chip packaged resistors)

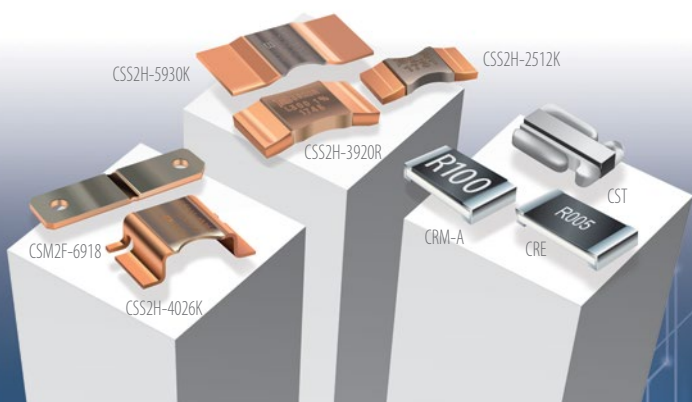

Applications

- Automation equipment
- Battery Management Systems (BMS)
- Battery packs
- DC/DC converters
- Input amplifiers
- Navigation equipment
- Medical equipment* (excluding critical life support)
- Precision circuits
- Printers
- Power supplies
- Smart meters
- Stepper motor drives
- White goods

**Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice <http://www.bourns.com/docs/legal/disclaimer.pdf>.*


Power Resistors

Types Available:

- High surge withstand and UL1412 listed safety fusible wirewound resistors
- Surface mount wirewound resistors
- High power thick film: DPAK, D2PAK, TO220

Features:

- Through-hole and surface mount
- 0.002 ohms to 130k ohms
- 0.5 watts to 100 watts
- 0.5 % to 5 % tolerances
- AEC-Q200 compliant models available (TO220, DPAK and D2PAK packaged resistors)
- Excellent surge performance

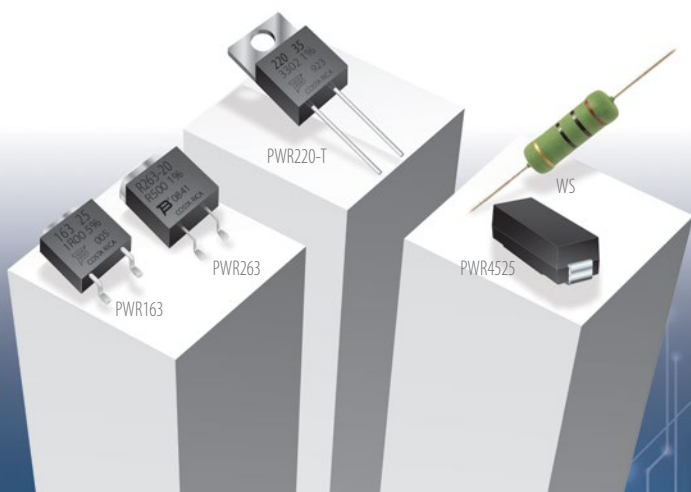

Applications

- AC power supplies
- Audio equipment
- Base stations
- Battery controls
- Combiners
- Industrial equipment
- Isolators
- LED lighting
- Medical equipment*
(excluding critical life support)
- Motor controllers
- Renewable energy
- Smart meters
- Surge protection
- Telecommunications
- White goods

Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice <http://www.bourns.com/docs/legal/disclaimer.pdf>.* **35


Precision Sensors

Types Available:

- Pressure sensors
- Humidity sensors

Features:

- Ultra-low sensing: 250 Pa to 1.0 PSI
- High pressure sensing: 15 PSI to 500 PSI
- Extreme sensitivity and stability
- Certain harsh media compatibility: (air, liquid, gas)
- Analog and digital output options
- Differential and gauge options
- Active temperature compensation
- Highly accurate humidity sensing with digital output
- RoHS and REACH compliant*

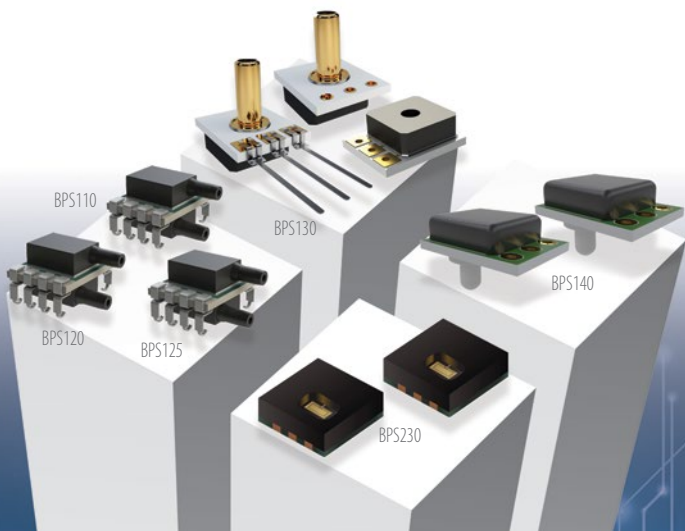

Applications

Medical Devices

(low/medium risk) **

- Portable oxygen generators
- Nebulizers
- CPAP equipment
- Diagnostic spirometers

Industrial

- HVAC
- Process control
- Food processing
- Packaging automation
- Pneumatic control
- Gas flow instrumentation

Consumer

- Home appliances
- White goods
- Office automation

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

**Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice <http://www.bourns.com/docs/legal/disclaimer.pdf>.

Rotary Position Sensors

Types Available:

- Rotary

Mounting options

- Bushing
- Servo mount

Terminal Styles

- PC pins
- Solder lugs
- Solder eyelets
- Insulated flexible wire leads*


Features:

- Non-contacting "Hall Effect" technology
 - Single & multturn models available
 - Seal option available on some models
- Output

- Analog
- Pulse-width modulation (PWM)*
- Serial peripheral interface (SPI)*
- Synchronous serial interface (SSI)*

Sizes (vary by model)

- 20 mm and 22 mm diameter

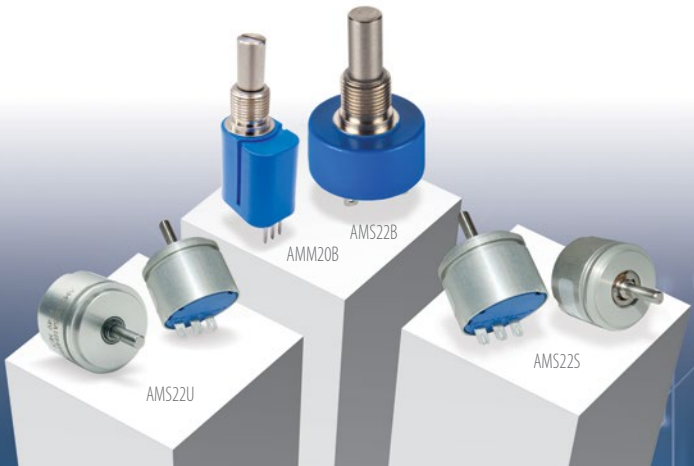

Applications

- Automated packaging and processing equipment
- Construction & agricultural vehicles
- Clean energy equipment
- Factory automation & assembly equipment
- HMI & MMI (Human-machine & machine-machine Interface)
- Material handling equipment
- Medical diagnostic & patient care equipment (excluding critical life support)
- Stage production & robotic lights

* available as custom option

Commercial Panel Controls & Encoders

Types Available:

Panel Controls

- Rotary
- Motorized rotary

Encoders

- Incremental contacting

Mounting Options

- Bushing • Bushingless
- PC mount • Solder lug


Features:

Sizes (vary by model)

- 9 to 24 mm (rotary panel controls)
- 12 and 16 mm square (encoders)

Options

- Panel controls:
 - Several taper options
 - Rotary switch option[†]
 - Multi-cup option[†]
 - Push/pull switch option[†]
- Encoders:
 - Momentary push switch
 - Detents available on some resolutions

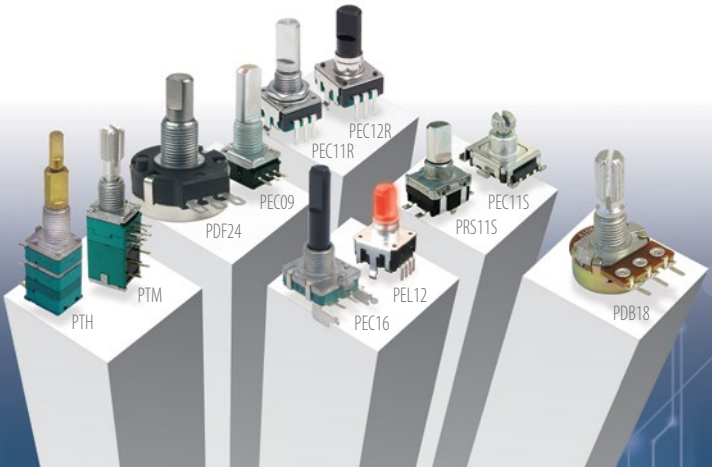

Applications

- Communications equipment
- Kitchen appliances
- Irrigation controls
- Medical equipment*
(excluding critical life support)
- Portable electronics
- Power tools
- Test and measurement instrumentation

[†] available on some models

**Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice <http://www.bourns.com/docs/legal/disclaimer.pdf>.*

Industrial Panel Controls

Types Available:

- Rotary

Mounting options

- Bushing
- PC mount
- Snap-in
- Reverse audio

Terminal Styles

- PC pins
- Solder lugs

Features:


Output

- Linear taper
 - Audio taper
 - Custom taper
- Sizes (vary by model)

- 9 to 23 mm

Options

- Flexible lead-wires
- Rotary switch option[†]
- Multi-cup option[†]
- Boardwash seal option[†]

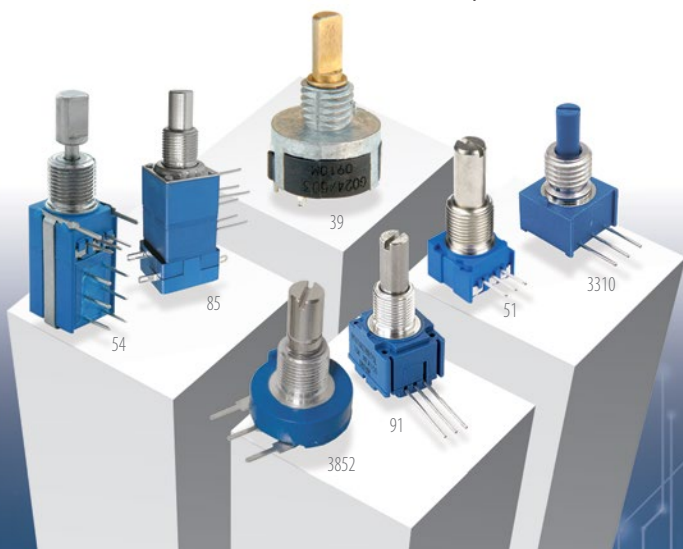

Applications

- Avionics and aerospace
- Environmental test equipment
- HMI (Human-machine interface)
- Irrigation controls
- Industrial equipment controls
- Medical instrumentation and equipment*
(excluding critical life support)
- Military grade equipment
- Test and measurement instrumentation
- Video conferencing equipment

[†] available on some models


Pro Audio Products

Types Available:

- Rotary

Features:

- Flatted, knurled or plain shafts
- Metal and plastic shafts
- Splash seal
(available on some models)
- Various standard resistance codes
- Various standard tapers
- PC pin and solder lug options
(available on some models)
- Dual concentric shafts (Model PTJ90)

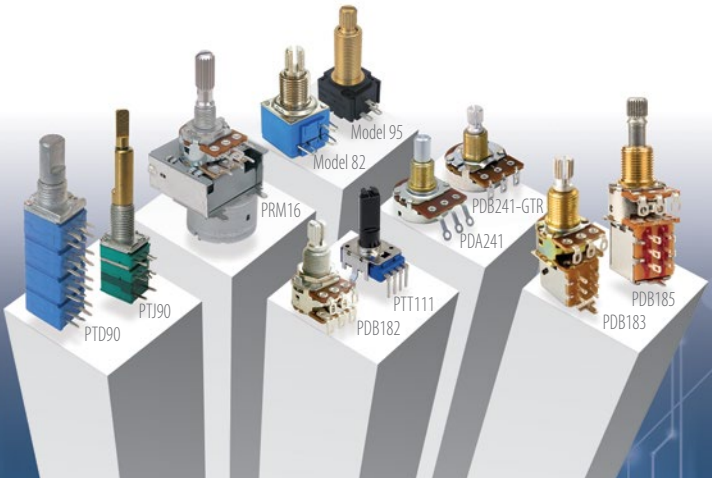

Applications

- Audio mixing consoles
- Bass guitars
- Broadcast consoles
- Electric guitars
- Instrument amplifiers
- Video mixing boards

Commercial Slide Potentiometers

Types Available:

- Manual
- Motorized
- Open frame & metal housing


Features:

Sizes (vary by model):

- 10 mm to 100 mm

Options

- Dust covers (available on some models)
- Single and dual gang
- Various lever styles and lengths
- Touch sense track (Model PSM)

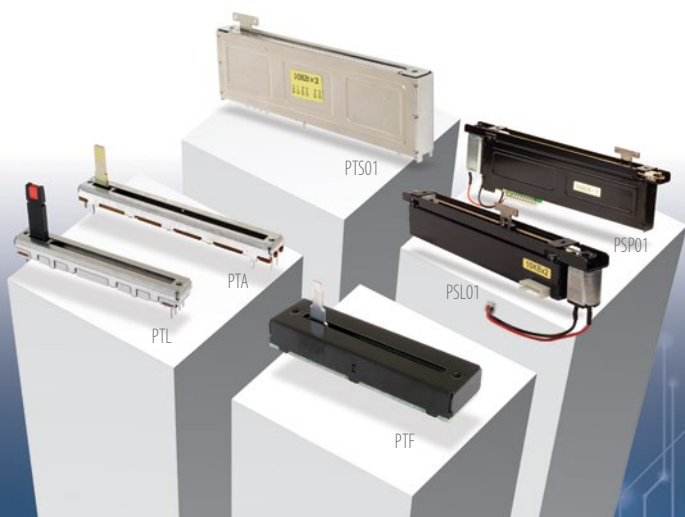

Applications

- Audio mixing consoles
- Broadcast consoles
- Medical equipment* (excluding critical life support)
- Pro lighting boards
- Test and measurement instrumentation
- Video mixing boards

**Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice <http://www.bourns.com/docs/legal/disclaimer.pdf>.*

Industrial Encoders

Types Available:

- Incremental contacting
- Incremental magnetic
- Absolute contacting
- Absolute/PWM magnetic
- Incremental optical

Mounting options

- Bushing
- PC board
- Snap-in
- Servo

Features:

Resolution


- Contacting – 6 PPR to 36 PPR options
- Optical – 25 PPR to 256 PPR options
- Magnetic – 32 PPR to 512 PPR and 1024 PPR states options

Sizes (vary by model)

- 9, 16, 22 mm square & 16 mm x 22 mm

Options

- Detents†
- Momentary push switch†
- Shaftless versions†
- Sealable to IP 65 & 67†

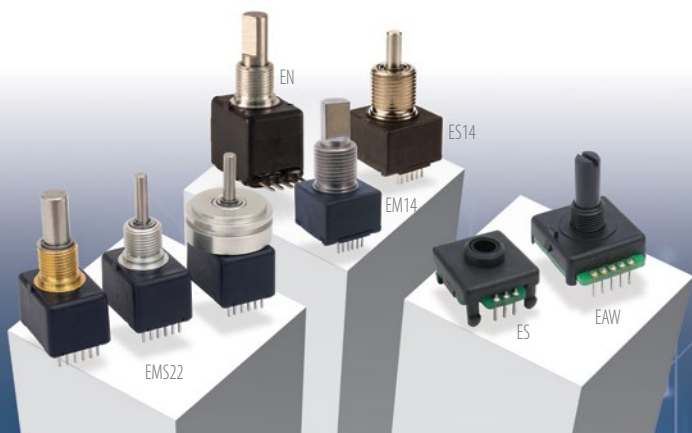

Applications

- Audio/visual equipment
- Communications equipment
- Forklifts and material handling
- Household appliances
- Industrial heavy equipment
- Medical equipment*
(excluding critical life support)
- Robotics
- Scanners and copiers
- Test and measurement instrumentation

† available on some models

*Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice <http://www.bourns.com/docs/legal/disclaimer.pdf>.

Precision Controls

Types Available:

- Rotary
- Digital push-button
- Single and multiturn

Mounting options

- Bushing • PC mount
- Snap-in • Servo mount

Terminal Styles

- PC pins
- Solder eyelets
- Turret terminals
- Insulated flexible wire leads

Features:

Output

- Linear
- Custom taper
- Audio taper
- Reverse audio

Sizes (vary by model)

- 13 to 51 mm diameter

Options

- Clutch
- Rotary switch option†
- Multi-cup option†
- Boardwash seal option†
- Sideload capability†



Applications

- Actuators
- Amplifiers
- Avionics
- HMI & MMI (Human-Machine & Machine-Machine Interface)
- Communications equipment
- Environmental test equipment
- Industrial equipment controls
- Medical instrumentation and equipment* (excluding critical life support)
- Military
- Test and measurement instrumentation

† available on some models


Linear Motion Potentiometers

Types Available:

- Rectangular body
- Flexible lead
- Conductive plastic element

Features:

- 0.12 to 0.25 watt power ratings
- 3.81 mm to 12.7 mm stroke lengths
- Approximately 500,000 cycles actuation life
- 1k ohm to 50k ohm standard resistance values

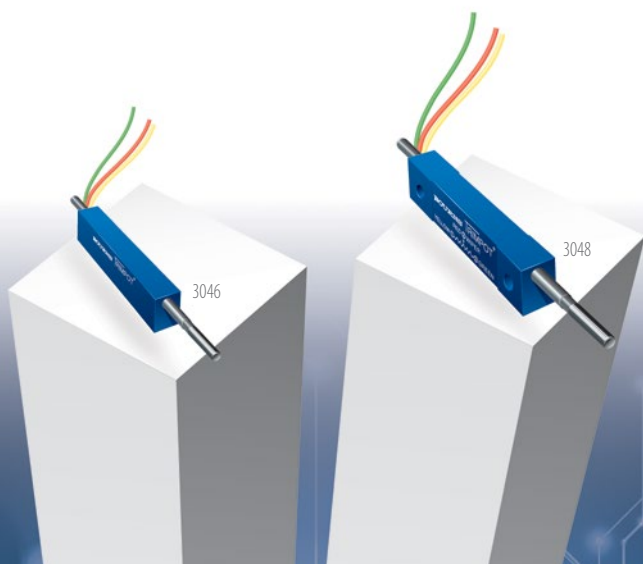

Applications

- Copy machine cassette paper size selectors
- Infusion pumps*
- Rear view mirror position feedback
- Position sensing

**Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice <http://www.bourns.com/docs/legal/disclaimer.pdf>.*

Turns-Counting Dials

Types Available:

- Concentric dial

Features:

Materials

- Metal (industrial)
- Plastic (commercial)

Turns

- Up to 20 turns available

Sizes (vary by model)

- 22 to 46 mm

Options

- Black face and silver face dials available
- Locking brake



Applications

- Automation control panels
- Environmental test equipment
- Industrial equipment controls
- Medical instrumentation and equipment*
(excluding critical life support)
- Power supplies
- Test and measurement instrumentation

**Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice <http://www.bourns.com/docs/legal/disclaimer.pdf>.*

Surge Protective Devices

Types Available:

- 1, 2, 3 & 4 pole
DIN rail mountable
- N-type connector
- F-type connector
- Residential enclosure
- Commercial enclosure

Features:

AC Surge Protective Devices

- Pluggable
- DIN rail type
- 50 kA - 100 kA rated

DC Surge Protective Devices

- 12 V, 24 V, 48 V, 75 V or 110 V
DC power

Signal & Data Line Protective Devices

- Gigabit Ethernet
- T1/E1 applications
- RS-232, RS-422, RS-423, RS-485,
20 mA and 50 mA instrument loops

Coaxial Surge Protective Devices

- RF applications from
DC-1 GHz, 50 ohms



Applications

- 2-way base stations
- Antennas
- Broadband
- CATV
- Cellular
- Commercial enclosures
- Ethernet
- GPS
- Microwave
- Residential enclosures
- Satellite video
- Transceivers
- UHF, VHF transmitters

Central Office & Outside Plant Products

Types Available:

- Protection - 5-pin modules:
 - 3-type overvoltage only
 - 4-type overvoltage and sneak current
- Station protection
- Digital subscriber line (DSL) products
- Protection connector blocks
- Terminal blocks

Features:


- Surge protection
- Modular units
- UL listed
- RUS and Telcordia compliant



Applications

- Building entrances
- Central office
- Customer premises
- Industrial process control
- Outside plant
- Military premises
- Telecommunications
- Telephony
- Transportation
- Voice, data, network lines

Bourns Website

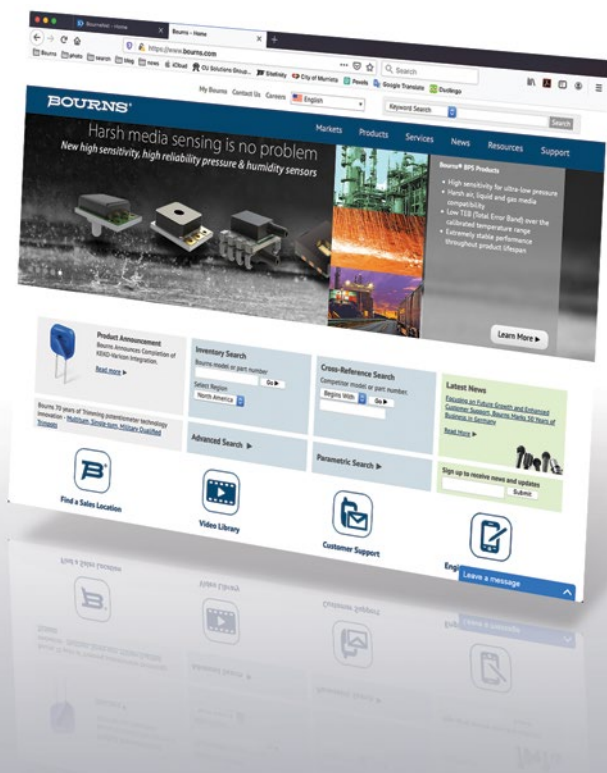

Our interactive, user-friendly site contains the answers to your product and design questions with the most accurate and up-to-date Bourns information. Data sheets, application notes and other technical information are available in easy-to-download, PDF format.

Visit our web site:
www.bourns.com

Worldwide Sales Offices

Country/Region	Phone	Email
Americas:	+1-951-781-5500	americus@bourns.com
Brazil:	+55 11 5505 0601	americus@bourns.com
China:	+86 21 64821250	asiacus@bourns.com
EMEA:	+36 88 885 877	eurocus@bourns.com
Japan:	+81 49 269 3204	asiacus@bourns.com
Korea:	+82 70 4036 7730	asiacus@bourns.com
Singapore:	+65 6348 7227	asiacus@bourns.com
Taiwan:	+886 2 25624117	asiacus@bourns.com
Other Asia-Pacific Countries:		
	+886 2 25624117	asiacus@bourns.com

Technical Assistance

Region	Phone	Email
Americas:	+1-951-781-5500	techweb@bourns.com
Asia-Pacific:	+886 2 25624117	techweb@bourns.com
EMEA:	+36 88 885 877	eurotech@bourns.com

Bourns KK

Region	Phone	Email
	+81 6 4790 8211	techweb@bourns.com

"ENERGY STAR" is a registered trademark of the U.S. Government.
"freeXpansion", "TCS" and "SinglFuse" are trademarks of Bourns, Inc.
"Bourns", "ChipGuard", "MSP", "Multifuse", "Sparctube", "TBU", "Trimpot"
and "FLAT" are registered trademarks of Bourns, Inc. in the United States
and other countries. "TISP" is a registered trademark of Bourns Ltd., a
Bourns Company, in the United States and other countries, except that
"TISP" is a registered trademark of Bourns, Inc. in China.

Copyright© 2020, Bourns, Inc. • Litho in USA • PSG • 01/20 • 3M/K2002

www.bourns.com



BOURNS®